


D6534A

250W Active 10" Full Range Professional Speaker

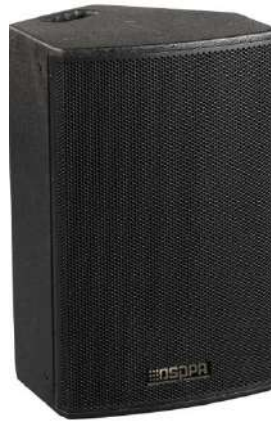

Description

D6534A professional active conference speaker is powered by high peak power switching power supply, with Class-D independent power amplifier. The speaker has rich even harmonics, mellow sound quality, with pure and natural sound quality performance. It is suitable for performances, conferences, squares, shopping mall, etc.

Features

- Rated Power: 250W
- Drive unit: 10" bass×1, 1.3" tweeter x1
- Frequency Response: 65 Hz – 18,000Hz
- Sensitivity: 96±2dB
- Max. SPL: 120±2dB
- High peak power switching power supply
- Class-D independent power amplifier
- With one XLR input and one XLR output
- Qualcomm filter selection: 20Hz~400Hz optional
- Excellent mobile occasion application
- Dual professional power interface.

Specifications

| Model | D6534A |
|-------------------------------|-----------------------------|
| Drive Unit | 10" bass×1, 1.3" tweeter x1 |
| Freq. Response | 65 Hz – 18,000Hz |
| Speaker Sensitivity | 96±2dB |
| Max. SPL | 120±2dB |
| Active Signal Input Impedance | 20 kΩ |
| Amplifier Power | 350W |

| | |
|-------------------------------------|-------------------|
| Speaker Continuous Power | 250W (AES) |
| Directivity (HxV) | 100°×50° |
| Amplifier Distortion | <0.05% |
| Damping Coefficient | >400 |
| Working Voltage | AC220V/50Hz |
| Dimensions (Height × Width × Depth) | 505mm×320mm×313mm |
| Weight | 15kg |

Dimensions

